

## Motopompa Diesel 6 LD 400 LSY-2


### Caracteristici constructive :

- Pompa centrifugala monoetajata
- Monobloc cu motorul
- Montata pe cadru
- Pompele sunt realizate din fonta si sunt prevazute cu etansare moale
- Pompele au inaltimea maxima de aspiratie 6 mCA cu sorb cu clapeta
- Diametru aspiratie 3" / refulare 2"
- Debit 70 m<sup>3</sup>/h
- Inaltime de pompare 40 mCA
- Masa 95 kg
- Pornire manuala



### Motor Diesel 6 LD 400

Cilindri	1 cilindru
Capacitate cilindrica	395 cm <sup>3</sup>
Alezaj x cursa	86 x 68mm
Putere max neta	8.5 CP / 3600 rpm
Moment max.	2200 rpm
Raport compresie	18:1
Capacitate rezervor	4.5 l
Consum carburant	1.2 litri / h

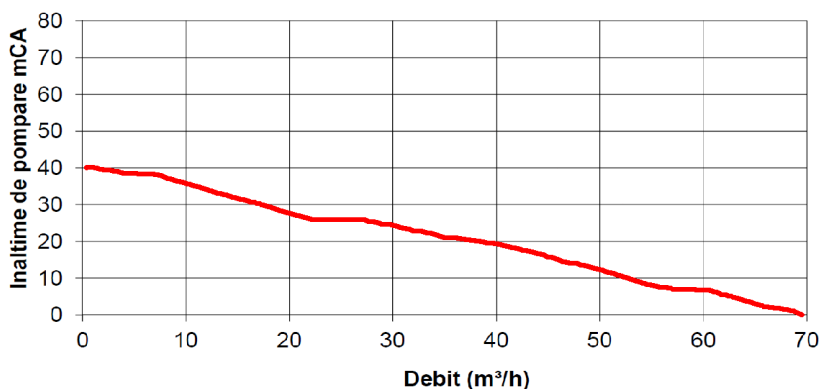

**RINA SIMTEX**  
ISO 9001 REGISTERED C.3860.1

### Recomandari in utilizare :

- irigatii, desecari, instalatii de stins incendii
- alimentare cu apa, instalatii mobile de interventii inundatii
- alimentare tamburi, instalatii cu aspersoare sau picurare