



# POMPA SUBMERSIBILA DE DRENAJ BLACK 2x4 30-12 MA

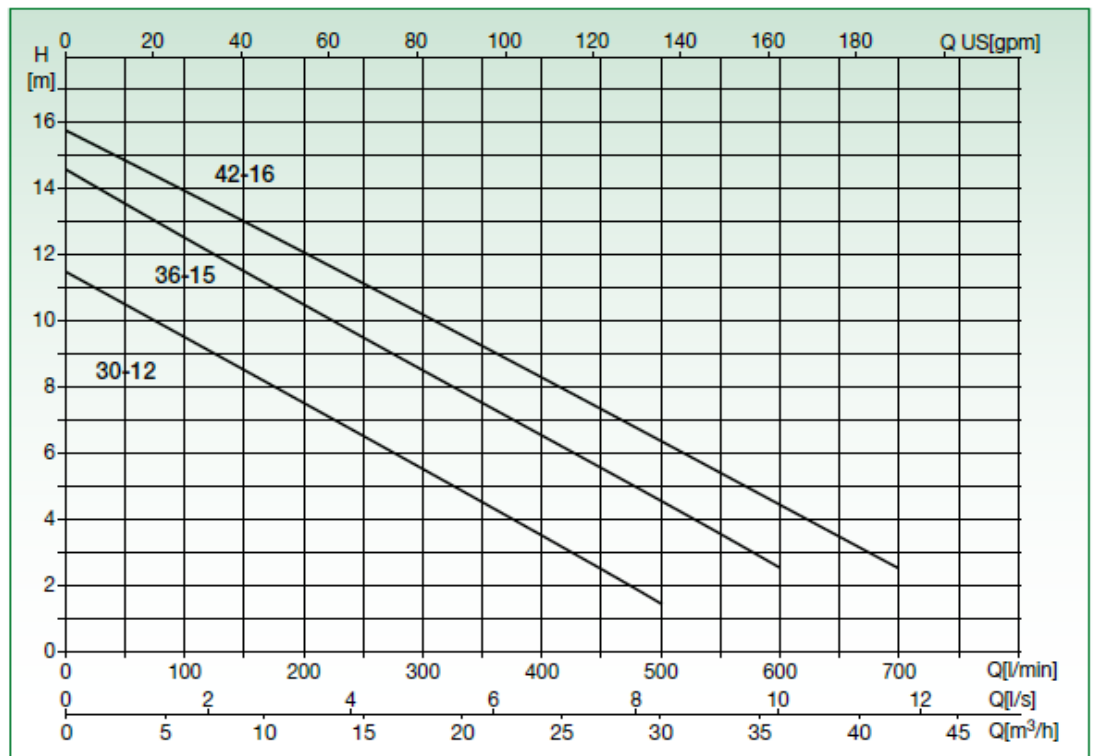

Electropompa submersibila pentru ape murdare in constructie de fonta si inox AISI304, avand orificiul de refulare dispus radial.  
 Carcasa motorului, corpul motorului, flansa suport a rulmentilor, sunt in constructie de inox (AISI 304).  
 Axul de antrenare este in constructie din inox (AISI 316).  
 Rotorul este din constructie de fonta, vortex.  
 Motor electric asincron in baie de ulei cu grad de protectie IP68, class F.

## PERFORMANTE:

Model	Motor				Debit									
	P <sub>1n</sub>	P <sub>2n</sub>	V <sub>n</sub>	I <sub>n</sub>	l/min	0	50	100	200	300	400	500	600	700
	kW	kW	V	A	m <sup>3</sup> /h	0	3	6	12	18	24	30	36	42
BLACK 2X4 30-12MA	1.5	0.75	230	7	H (m)	11.5	10.5	9.5	7.5	5.5	3.5	1.5	-	-

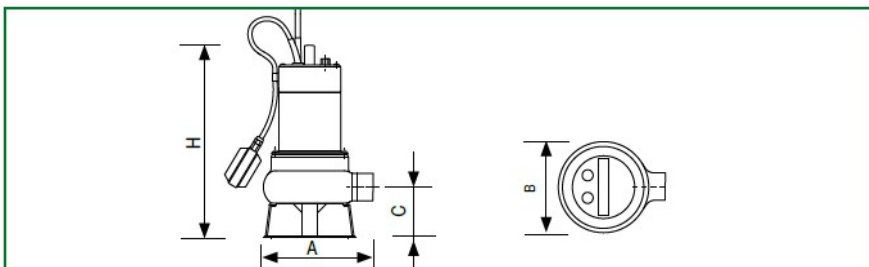

## DIMENSIUNI:

Model	Cablu	Dimensiuni (mm)				Orificiu		Diametrul solidelor in suspensie	Greutate (Kg)
	n <sup>o</sup> x mm <sup>2</sup>	H	A	B	C	mm	in		
BLACK 2F3 30-9 MA	3 x 1	369	214	180	88	50	2"	50	13